



Integrating Sustainable Development in the Planning and Design of Navy Facilities

*Energy 2004
Rochester, NY*

Dr. James Wright, P.E.

Chief Engineer

Naval Facilities Engineering Command



SD Program Accomplishments


- Developed NAVFAC Instruction 9830.1, "Sustainable Development Policy", 09 June 2003
- Developed NAVFAC MCON Programming Letter, 26 Nov 2003
- Awarded A/E contract to develop Unified Facilities Criteria (UFC), Sustainable Development, completion Dec 2004
- Awarded A/E contract to develop Whole Building Design Guide Design Tool analyzing and integrating the LEED Rating System with UFC 4-010-01, DoD Minimum Antiterrorism Standards for Buildings, completion Oct 2004
- Developed NAVFAC Design Build Master, Sep 2003
- Developed NAVFAC SD Upper Management Brief, Oct 2003





SD Program Accomplishments

- Conducted USGBC LEED Advanced Workshops at 5 NAVFAC field offices, May-July, 2004
- Awarded A/E contract to develop SD online training for all business lines
- Awarded A/E contract to meter develop metrics, collect data and create database for 7-9 sets of NAVFAC buildings

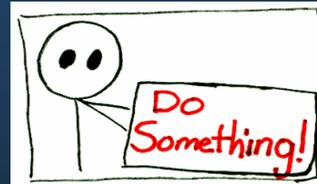

Initiatives

- Unified Facilities Guide Specifications – develop/add SD requirements/language
- Unified Facilities Criteria - develop/add SD requirements/language

3



NAVFACINST 9830.1

- Purpose: Reduce the **total cost of ownership** of shore facilities by implementing sustainable development (SD) concepts and principles.
- Policy: Reduce the **life-cycle cost** of facilities by incorporating SD and **use LEED Green Building Rating System** as a planning and design tool and a metric.
- Applicability: All applicable projects shall **meet the LEED Certified level**, unless justifiable conditions exist that limit the pursuit and accomplishment of the LEED credits necessary for achieving the Certified level.



4



Sustainable Development Tools



WBDG Design Tool

This tool will analyze and integrate the Leadership in Energy & Environmental Design (LEED) Green Building Rating System with Unified Facilities Criteria (UFC) 4-010-01, DoD Minimum Antiterrorism Standards for Buildings.



5



Sustainable Development Tools

NAVFAC Design Build Master

Design Guidance - Microsoft Internet Explorer

Address: http://localhost:8155/WebForm5.aspx

NAVY DESIGN-BUILD REQUEST FOR PROPOSAL WEB SITE

HOME DEVELOPMENT HISTORY DIVISION 00 DIVISION 01 PERFORMANCE TECHNICAL SPECIFICATIONS DESIGN GUIDANCE DOWNLOAD HOT TOPICS COMMENT

DESIGN GUIDANCE (UFC)

- ARCHITECTURAL
 - UFC 3-100-10N ARCH
- STRUCTURAL
- MECHANICAL
- ELECTRICAL
- CIVIL
- ENVIRONMENTAL
- FIRE PROTECTION
- OTHER GUIDANCE (UFC)

To process download, right click on icon | Select Save Target As

UNIFIED FACILITIES CRITERIA (UFC)

DESIGN: GENERAL ARCHITECTURAL AND INTERIOR DESIGN REQUIREMENTS

Done Local intranet

start Waste Transfer Design Guidance - M... Microsoft PowerPoint ... 7:12 PM

6



Metering and SD Metrics

Metrics for SD for Navy Facilities

The primary scope of this project is to measure the performance of 7 to 9 building sets (14 to 18 Navy buildings). Each building set will include one traditionally and one sustainably designed building). Building sets will be from NAVFAC's different geographic areas of responsibilities.



Measurement data will be used to:

- Determine LCC savings, ROI, O & M savings, productivity benefits
- Identify opportunities for building performance improvement
- Develop design guidance on best sustainable design options

7



SD Facility Accomplishments

The following slides show what NAVFAC has accomplished integrating sustainable development into the design and construction of facilities and what it can continue to do in the future.



8



High Performance and Value

Barracks Complex, Vicenza, Italy

- 2 Bldgs./10,800 SM
- 300 Personnel
- ECC = \$25,300,00



Sustainable Features


- Erosion control
- Site selection
- Reduced heat islands
- Energy Star roof
- Water efficient fixtures
- Indigenous landscaping
- 33% Energy cost reduction
- Local materials
- Recycled materials
- Daylight & views

9



What did we get for the \$ invested?

ECC = \$25,300,000
 LEED (Design) Costs = \$30,600
 SD First Costs (Construction) = 0
 Energy Cost Savings = \$52,809/yr
 ASHRAE Reduction = 33.25%
 LCC Savings = \$845,000



Simple Payback = .6 years
 Energy Savings = 602,445 kWh/yr
 LEED Rating = USGBC Silver
 LEED Credits = 35

10



High Performance and Value

Defense Intelligence Analysis Center Addition Bolling Air Force Base, District of Columbia

- 6 storey 450,000 sf office building
- ECC = \$100,000,000 +
- Integrates SD with DoD ATFP Standards



11



Sustainable Strategies

Utilized excess capacity of existing chiller plant.

T-8 pendant lighting in offices w/ occupancy sensor

Metal Halide lights in garage.

Bio-retention pond – protect Anacostia River & Chesapeake Bay.

Indigenous low-maintenance plants.

Sun control – shading devices w/ high reflective glass.

Low-flow toilets.

New Commissioning Manual.

Recycle 80,000 cm excavated soil. Haul locally to Navy picnic area. Save DIA \$400K & Navy \$400K.

Low VOC materials and increased ventilation rate.

Crush demo concrete on-site and use aggregate for new work.

Fly-ash in concrete.

Specify use of local materials.

Incentive Bonus to insure cooperation.



12



DIAC Addition South Elevation



13



DIAC Addition South Elevation




CAMERA ONE

SmithGroup

14



High Performance and Value

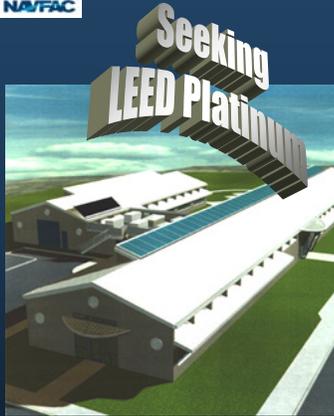

AIA/COTE
2002 Top Ten
Green Project

BUILDING 850

Port Hueneme, CA

- 10, 000 sf renovation & 7,000 sf addition
- Public Works Department admin building


Sustainable Features

- Prototype natural gas heat pump A/C
- VAV under floor distribution system
- High efficiency pulse boilers
- Natural ventilation
- Solar space & domestic water heating systems
- Photovoltaic power generation system
- Daylighting
- Shading & innovative glazing elements
- Fluorescent lighting
- Occupancy & photo sensors controls

15




NAVY'S ENERGY DEMONSTRATION FACILITY

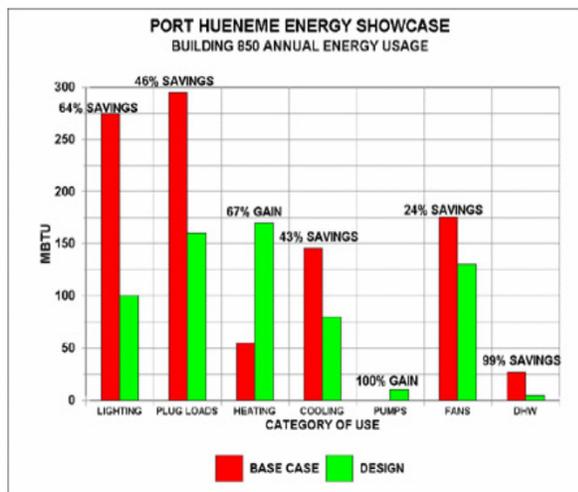

16



Integrated Design

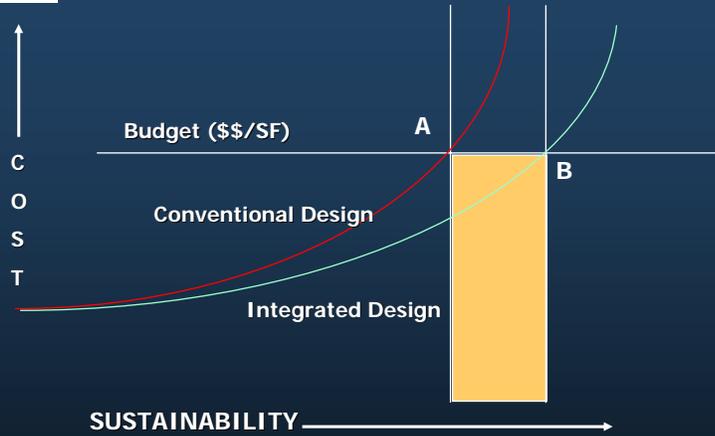

Integrated design is the key to making effective life cycle design decisions that manage cost and deliver BEST VALUE.



17



Questions & Comments

Point of Contacts

NAVFAC Chief Engineer
Dr. James W. Wright, P.E.
(202) 685.9167
james.w.wright2@navy.mil



NAVFAC SD Program Manager
Dennis O. Talton, R.A.
(757) 322.4211
dennis.talton@navy.mil



18